

STEEL 0206



3 - 14 years



23 kids



55,9 m²



Material specification

- Hot-dip galvanized and powder coated or powder galvanized and powder coated steel construction of 80 x 80 cm profile,
- Platforms and climbing walls made of durable anti-slip and waterproof plywood or HPL plate,
- Roofs, side panels made of durable HDPE or HPL plate, resistant to weather conditions,
- Fireman's pole and tubular sled made of stainless steel,
- Durable climbing stones made of polyester resin composite with mineral fillers,
- Steel ropes in polypropylene braid, connected with durable plastic elements, stainless steel or aluminum,
- Hot-dip galvanized and powder coated steel bars,
- Grips made of synthetic material,
- Screws covered with plastic caps and/or stainless steel screws,
- Safe end caps on top of the structure made of rubber or polypropylene,



Physical development



balance



sliding



pull-up



passage



climbing





4
number of towers



1
number of roofs



8
number of activity elements

Product technical sheet

STEEL 0206

Product data




| | |
|--------------------------------|---------------------|
| Length | 535 cm |
| Width | 457 cm |
| Total height | 321 cm |
| Age group | 3 - 14 years |
| Number of users | 23 kids |
| Safety zone | 55,9 m ² |
| Free fall height | 210 cm |
| The height of the platforms | 120 cm |
| In accordance with norm EN | 1176-1:2017 |
| Weight of the heaviest part | 102 kg |
| Dimensions of the largest part | 110x370x110 cm |
| Availability of spare parts | YES |
| Installation time | 10 h |

Color options

Data is subject to change without prior notice.

Additional information

- equipment intended for public playgrounds;
- equipment has a certificate issued by an accredited entity or a declaration of conformity;
- no sharp edges or chinks that would pose a danger of jimmie the head, fingers or any other body parts;
- anchoring on flat surface, 80/70/60 cm deep;
- render is for reference only, the actual appearance of the equipment and its color may vary;

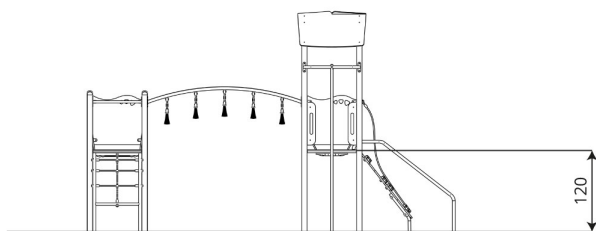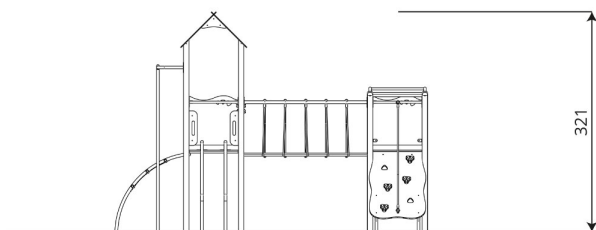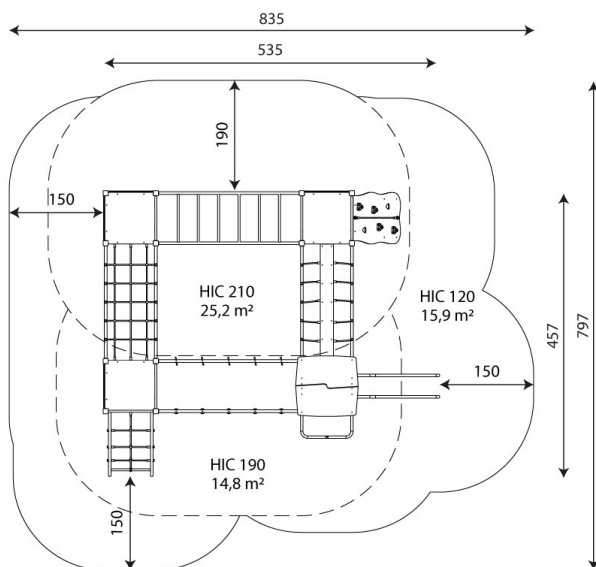

Guarantee

30

30 year guarantee - Structural strength of steel and stainless steel components

15

15 year guarantee - Structural failure of steel and stainless steel, for dynamic equipment

10

10 year guarantee - Structural failure of high density polyethylene and high pressure laminates components

5

5 year guarantee - Corrosion of stainless steel and hot dip galvanized and powder coated components; against bark beetles and rot in case of wooden structural elements

Detailed information in the guarantee card



Surfaces according to EN 1176-1:2017

| | Description (mm) | Layer thickness (cm) | Maximum fall heights (cm) |
|---------------------------------|------------------------------|----------------------|---------------------------|
| Turf/ top layer of soil (A,B,C) | - | - | ≤100 |
| bark (A,C) | Particle size from 20 to 80 | 30 | ≤200 |
| | | 40 | ≤300 |
| woodchips (A,C) | Particle size from 5 to 30 | 30 | ≤200 |
| | | 40 | ≤300 |
| sand or gravel (A,C) | Particle size from 0,25 to 8 | 30 | ≤200 |
| | | 40 | ≤300 |
| synthetic attested (A,B,C) | Tested according to EN 1177 | | 210 |

Product technical sheet

STEEL 0206

Amount of safe surface corresponding with free fall height:

HIC 120 15,9 m²

HIC 190 14,8 m²

HIC 210 25,2 m²

Data is subject to change without prior notice.

