

# MINISWEET 0114



1 - 8 years



26 kids



34,9 m<sup>2</sup>



## Material specification

- Stainless steel, hot-dip galvanized and powder coated or powder galvanized and powder coated steel construction of 80 x 80 cm profile,
- Platforms and steps made of durable anti-slip and waterproof plywood or HPL plate,
- Roofs, side panels made of durable HDPE or HPL plate, resistant to weather conditions,
- Slides made of stainless steel with durable HDPE or HPL side panels,
- Fireman's pole made of stainless steel,
- Educational panels and moving elements made of HDPE or HPL plate, resistant to weather conditions,
- Spherical windows made of polycarbonate,
- Flowers made of durable HDPE or HPL plate, resistant to weather conditions; underground installation made of synthetic material connects 2 stainless steel profiles allowing the communication,
- Double wall tube passage made of polypropylene,
- Stainless steel bars and handrails,
- Screws covered with plastic caps and/or stainless steel screws,
- Safe end caps on top of the structure made of rubber or polypropylene,



### Facilitating disability



easy access



integration



### Intellectual development



manipulation



music



thinking



### Physical development



hiding



sliding



climbing



crawling





**4**  
number of towers



**2**  
number of slides



**2**  
number of roofs






**6**  
number of interactive elements



**1**  
number of activity elements



stairs

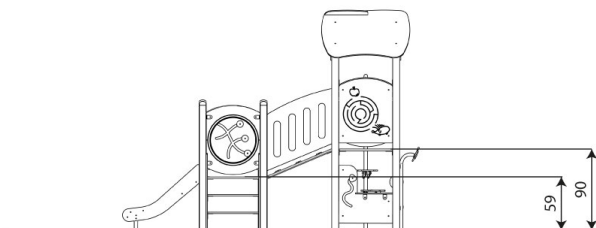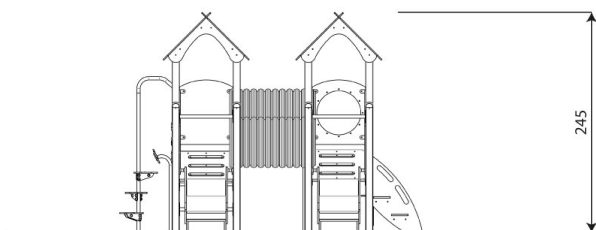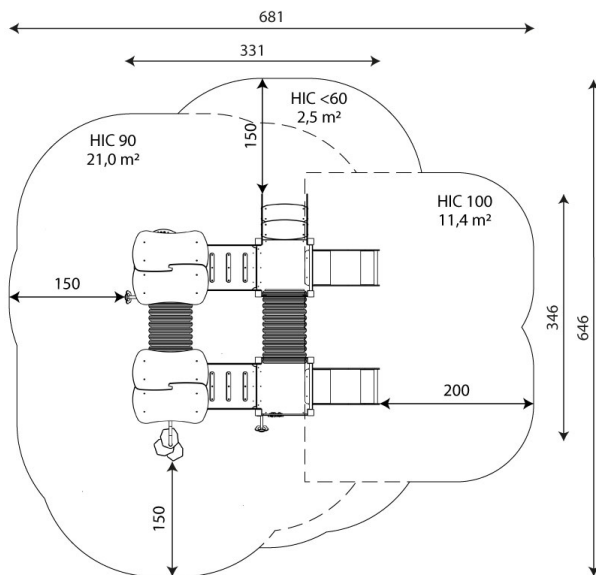

**Product technical sheet**

**MINISWEET 0114**

**Product data**

|                                |              |
|--------------------------------|--------------|
| Length                         | 331 cm       |
| Width                          | 346 cm       |
| Total height                   | 245 cm       |
| Age group                      | 1 - 8 years  |
| Number of users                | 26 kids      |
| Safety zone                    | 34,9 m2      |
| Free fall height               | 90 cm        |
| The height of the platforms    | 59,90 cm     |
| In accordance with norm EN     | 1176-1:2017  |
| Weight of the heaviest part    | 15 kg        |
| Dimensions of the largest part | 63x263x60 cm |
| Availability of spare parts    | YES          |
| Installation time              | 10,5 h       |
| Color options                  |              |

Data is subject to change without prior notice.

**Additional information**

- equipment adapted for the disabled; intended for public playgrounds;
- equipment has a certificate issued by an accredited entity or a declaration of conformity;
- no sharp edges or chinks that would pose a danger of jimmieing the head, fingers or any other body parts;
- anchoring on flat surface, 80/70/60 cm deep;
- slide should not be installed southwards;
- render is for reference only, the actual appearance of the equipment and its color may vary;

**Guarantee**

**30**

30 year guarantee - Structural strength of steel and stainless steel components

**15**

15 year guarantee - Structural failure of steel and stainless steel, for dynamic equipment

**10**

10 year guarantee - Structural failure of high density polyethylene and high pressure laminates components

**5**

5 year guarantee - Corrosion of stainless steel and hot dip galvanized and powder coated components; against bark beetles and rot in case of wooden structural elements

Detailed information in the guarantee card

Vinci Group Sp. z o.o.  
Seminarnyja 9 Street  
99-400 Łowicz

VAT: 534-250-14-46  
PHONE: +48 42 203 24 99 ext. 26  
M: +48 793 404 991



biuro@vinci-play.com  
info@vinci-play.com  
[www.vinci-play.com](http://www.vinci-play.com)

## Surfaces according to EN 1176-1:2017

|                                 | Description (mm)             | Layer thickness (cm) | Maximum fall heights (cm) |
|---------------------------------|------------------------------|----------------------|---------------------------|
| Turf/ top layer of soil (A,B,C) | -                            | -                    | ≤100                      |
| bark (A,C)                      | Particle size from 20 to 80  | 30                   | ≤200                      |
|                                 |                              | 40                   | ≤300                      |
| woodchips (A,C)                 | Particle size from 5 to 30   | 30                   | ≤200                      |
|                                 |                              | 40                   | ≤300                      |
| sand or gravel (A,C)            | Particle size from 0,25 to 8 | 30                   | ≤200                      |
|                                 |                              | 40                   | ≤300                      |
| synthetic attested (A,B,C)      | Tested according to EN 1177  |                      | 100                       |

## Product technical sheet

# MINISWEET 0114

### Amount of safe surface corresponding with free fall height:

HIC <60 2,5 m<sup>2</sup>

HIC 90 21,0 m<sup>2</sup>

HIC 100 11,4 m<sup>2</sup>

Data is subject to change without prior notice.

